



SLS SERVER

(part of Smart Locking System)



DESCRIPTION

- As part of **Smart Locking System** it allows you to connect with the administrator's computer
- The installed software gives you fast and easy control over the entire system
- Keeps the database of all 512 users
- It works with all locking mechanisms
- Opportunity for sounder for RF reader
- Power supply: 180 - 220V AC
- Max power consumed: 21VA
- Battery Out:
 - battery - 12V-7AH
 - max power supply - 13,5V
 - charging current - 1,5A
 - battery swap protection
 - short circuit protection
- Electrical magnet Out:
 - power supply out - 13,5V
 - short circuit protection or overcharge - max. 3A
 - operating current - 1,5A
- Dimensions: 85 x 70 x 58mm

VIEW


- front



VIEW

- top

Locking device Button RF Reader

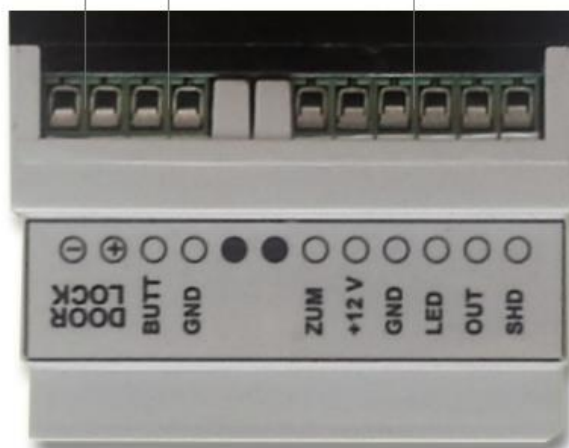

- underneath



AC 220V

DC 12V